

High Efficiency  
PERC Module

# GSM- MP6/120- M340

320W | 325W | 330W  
335W | 340W



**340W**  
Maximum Power Output

**20.30%**  
Maximum Efficiency

**25Years**  
Linear Power Warranty

## Product Features



### MBB Half Cell

Multi-busbar half cell design, together with many other technologies to increase module power and efficiency



### High Energy Yield

High density interconnection technology optimizes module efficiency up to 20.30%



### G1 Cell/Module

Small in size, big on efficiency, applicable to multiple scenarios



### High Reliability

Certified mechanical performance up to 5400 Pa positive load and 2400 Pa negative load, with better protection against harsh weather



### Higher Performance

Low temperature coefficient, low operating temperature, more energy yield




### Better Warranty

Low LID/PID in longer service life, less than 15% power degradation in 25 years

## Quality Assurance

**12** Years Product Warranty

**25** Years Linear Power Warranty

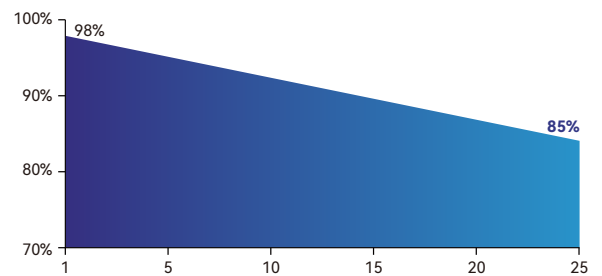

## Certificates




Guosheng Energy Co., Ltd.

Web: [www.grandsunergy.com](http://www.grandsunergy.com) E-mail: [sales@grandsunergy.com](mailto:sales@grandsunergy.com)

Add: West Side to Zhongjing 7th Road, South Side to Pengcheng Boulevard, Xuzhou Industrial Park, Xuzhou City, Jiangsu Province

## Mechanical Data

Cell(mm)	158×79
Weight(kg)	21±0.5kg
Dimension(L×W×H)(mm)	1682×996×35mm
Cable(mm)	4mm <sup>2</sup> , 300mm(customized length based on needs)
Frame	anodized aluminum
Junction Box	IP68, 1500VDC, 3 Diodes
Packaging configuration (40' Container; 17.5' Trailer)	31pcs/pallet, 26pallets/container, 806pcs/container 31pcs/pallet, 40pallet / Trailer, 1240pcs / Trailer

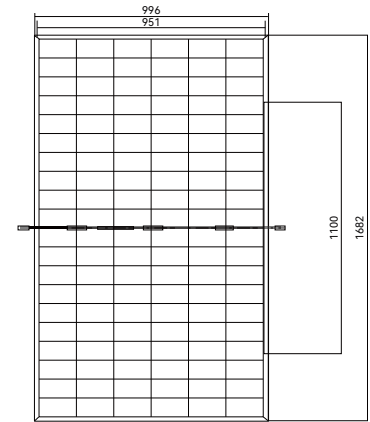

## Electrical Data (STC)

Model	GSM-MP6/120-M320	GSM-MP6/120-M325	GSM-MP6/120-M330	GSM-MP6/120-M335	GSM-MP6/120-M340
Pmax(Wp)	320	325	330	335	340
Voc(V)	41.6	41.9	42.2	42.6	43
Isc(A)	9.98	10.06	10.14	10.2	10.26
Vmpp(V)	33.7	34	34.3	34.6	34.9
Impp(A)	9.50	9.56	9.63	9.69	9.75
Efficiency	19.10%	19.40%	19.70%	20.00%	20.30%

STC: AM1.5 Irradiance: 1000W/m<sup>2</sup> Temperature=25°C

## Electrical Characteristics (NOCT)

Model	GSM-MP6/120-M320	GSM-MP6/120-M325	GSM-MP6/120-M330	GSM-MP6/120-M335	GSM-MP6/120-M340
Pmax(Wp)	237	241	245	248	252
Voc(V)	37.69	37.98	38.27	38.65	39.03
Isc(A)	8.14	8.22	8.28	8.32	8.35
Vmpp(V)	31.89	32.09	32.29	32.58	32.78
Impp(A)	7.46	7.52	7.58	7.63	7.70

$\alpha_{Isc} (\%/K) : 0.05$ ;  $\beta_{Voc} (\%/K) : -0.265$ ;  $\gamma_{Pmp} (\%/K) : -0.34$


NMOT standard: AM1.5 Front irradiance: 800W/m<sup>2</sup> Temperature=20°C Wind speed=1m/s

## Working Condition

Maximum System Voltage	1500VDC
Operating Temperature	-40°C ~ +85°C
Maximum Fuse Rating	20A
Rear Side Mechanical Load	2400Pa
Front Side Mechanical Load	5400Pa
NOCT	44±2°C
Safety Class	Class II
Grounding Electric Conductivity	< 0.1Ω

## I-V Diagram

(Different Irradiance)



## I-V Diagram

(Different Temperature)

